



# 6-EVF-90 (12V90AH/10HR)

| Dimensions  | Outer Dimensions   | Terminal Type   |
|---|--|---|
|   | months and the Self-discharge ratio less than 3%per<br>month at 25°C.Please charge batteries before using. | <ul> <li>UL1989 (MH46789)</li> </ul>  |
| Self Discharge  | LONGWAY batteries can be stored for more than 6  | - SAE J 1495-2018   |
| Container Material  | ABS (UL 94-HB) & Flame Retardant (94-V0)<br>available upon request   | SAE J1495-2018  |
| Terminal  | I5-1 (M6 stem)   | <ul> <li>IEC 60254-1- 2005</li> </ul>   |
| Maximum Charging Current  | 22.5A  |   |
| Equalization and Cycle Service  | 14.40~15.0VDC/unit Average @ 25°C  | • ISO 7176-25 - 2013  |
| Operating Temperature Range   | Discharge: -20°C~50°C; Charge: 0°C~40°C<br>Storage: -20°C~40°C   | APPLICATION STANDARDS   |
| Maximum Discharge Current   | 400A(3sec)   | ISO50001:2011   |
| Internal Resistance   | Approx. 5.50mΩ full charged @25°C  | ISO45001:2018   |
| Weight  | Approx.26.5± 3%kg(58.41lbs)  |   |
| 3Hr-rate(22.5A)   | 67.5AH@1.70Vper cell@25℃ (77°F)  | ISO14001:2015   |
| 5Hr-rate(15.3A)   | 76.5AH@1.70Vper cell@25℃ (77°F)  | ISO9001:2015  |
| 10Hr-rate (9.0A)  | 90.0AH @ 1.75V per cell@25°C (77°F)  | CEPTIFICATO   |
| 20hr -rate (4.5A)   | 95.0Ah @ 1.75V per cell@25°C (77°F)  |   |
| Nominal Capacity  | @25°C  | 1/ 15 SPA 11  |
| Nominal Voltage   | 12Volts (6 Cells per unit)   | ( B) X A)   |
| Specifications: Designed according with the IEC60254-2014                       |  |   |
| Electric play car for children Sanita   | ation vehicles and police patrol car etc.  |   |
| Applications: Electric vehicles, Electric scooter, Electric wheel chair,        |  |   |
| maintenance-free, high charging r   |  |   |
| This series adopts lightly gel technology, which has high safety & reliability, |  | State |
| LONG WAY 6-EVF-90 is one of the Deep Cycle battery of LONGWAY BATTERY.          |  |   |
| LONG WAY & EVE 00 is and of th  |  |   |
| 0-LVF-30 (12V30AH) 10HK)  |  |   |

#### Dimensions

Length:  $307 \pm 2mm$ Width :167±2mm Height :211±2mm Total Height :215±2mm







15-1

**Capacity Retention Characteristic** 

### Cycle Service Life



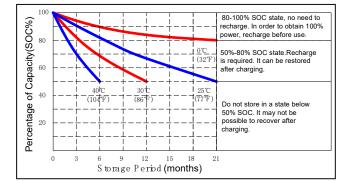

Kaiying Power Supply & Electrical Equip Co., Ltd

Add: Laogang Industrial Area, Chengxiang Town , Anxi, Quanzhou City, Fujian Province , China

Tel: 0595-68782266 Fax: 0595-68782222 Web: www.longwaybattery.com Email: sales@longwaybattery.com KY-IOP-6-EVF-90 A0. December 2021

NOTE: This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact Long Way for the latest information.

### Outer Dimensions

## **Ø**6