



Telecom/Power Backup Battery

6FM75FR (12V75Ah)

LONGWAY Telecom power backup battery series adopts front terminal design, which has the advantages of faster installation, saving floor space, long floating service design life, high energy density, leakage prevention and maintenance free. At the same time, the series of products designed standby life of 12 years. The products pass UL, CE, RoHS certification, and can be shipped by sea or air.



General Feature

- High reliability, safe without leakage. Maintenance free
- Thick plate, special formula paste process, with a long service life
- Environmentally friendly products
Meet EU battery directive RoHS and REACH standards
- The partition design protects the terminal from short circuit
- Widely applicable temperature range, can be used at -20°C~60°C
- Long Storage time. Battery with full state of charge under room temperature, after 6-12 months storage, it can be used & recovered (It is recommended to recharge after storage for 6 months or before use)


Applications

- Telecom systems
- UPS
- Power Backup
- Electric power system
- Communication base station
- Energy storage systems
- Solar systems

Performance

Nominal Voltage	12V (6cell)
Capacity	@25°C
20hr Rate (3.75A)	78Ah @ to 1.75V/cell
10hr Rate (7.50A)	75Ah @ to 1.70V/cell
3hr Rate (18.7A)	56.3Ah@ to 1.60V/cell
Weight	Approx (23.0±3%)kg (50.7lbs)
Internal Resistance	Approx 6.5mΩ fully charged @25°C
Maximum Discharge Current	500A(3sec)
Terminal	I6
Operating Temperature Range	Discharge:-20°C~60°C;Charge:0°C~50°C Storage:-20°C~40°C
Container Material	ABS(UL94 HB)/UL94-V0 Optional

Dimensions

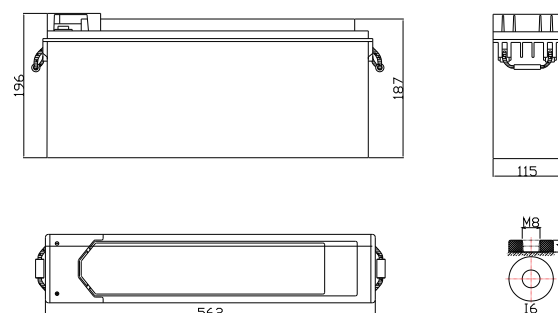

Length	562mm	22.13inch
Width	115mm	4.53inch
Height	187mm	7.36inch
Total height	196mm	7.72inch

Battery use

Cycle use

- 1.Limit the initial charging current to no more than 18.7A
- 2.Keep charging voltage at 14.40-15.00V/unit, and continue charging at least 3 hours after the charging current reduces to 1.5A to ensure full charge
- 3.The compensation coefficient of charging voltage and temperature is -5mv/cell /°C

Float use

- 1.Limit the initial charging current to no more than 18.7A
2. Keep charging voltage at 13.50-13.80V/unit. When the voltage reaches the constant voltage the current gradually decreases until the battery is fully charged and continues to charge
- 3.The compensation coefficient of charging voltage and temperature is -3mv/cell /°C



Kaiying Power Supply & Electrical Equip Co., Ltd Email: sales@longwaybattery.com
 Tel:0595-68782266 Fax:0595-68782222 Website: <http://www.longwaybattery.com>
 Add: Kaiying Industrial Area, Chengxiang Town, Anxi, Quanzhou, Fujian Province, China
 KY-IOP-FR12-75 B0. August 2023


Note: This information usually describes use only and is not intended to make any warranties or promises regarding the battery, Battery specifications and battery design are subject to change without prior notice. Please contact LONGWAY Battery for the latest information.




Telecom/Power Backup Battery

6FM75FR (12V75Ah)


Floating Charging Life VS Temperature

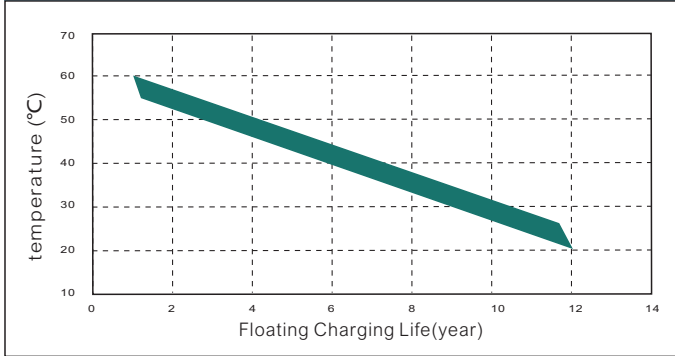


Floating Charging Characteristics Diagram

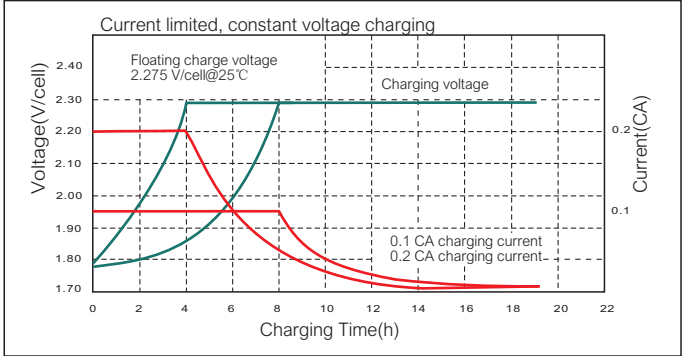


Cycle Life

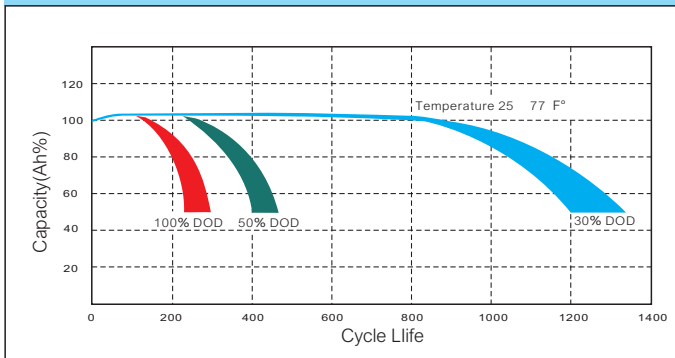


Cycle charging characteristic diagram

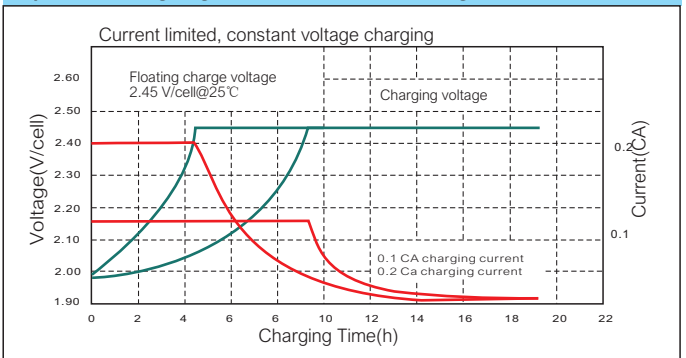

Temperature and capacity characteristics

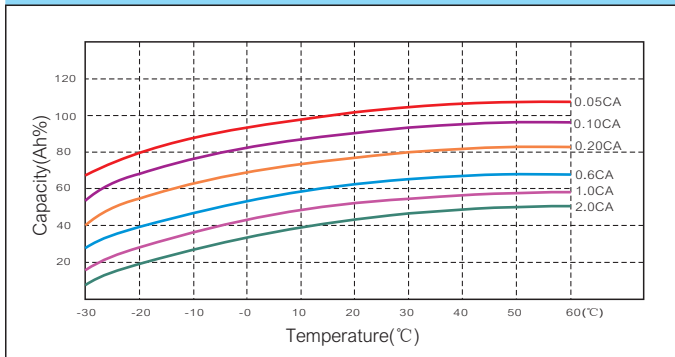

Self-discharge characteristic

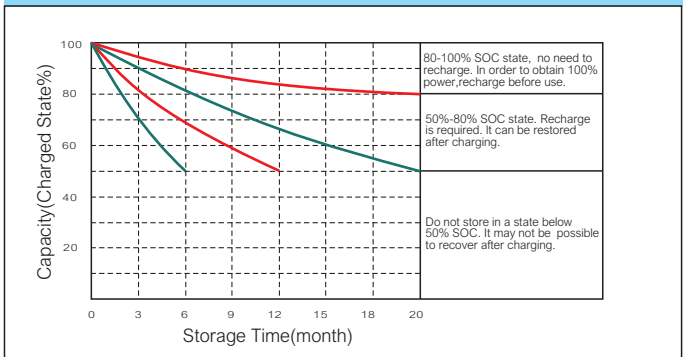

Constant current characteristics(A,25°C)

F.V/TIME	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60	187.5	150.0	127.5	78.75	41.25	27.04	19.03	12.94	9.03	7.61	3.84
9.90	181.9	145.5	125.0	77.18	40.43	26.91	18.94	12.88	8.94	7.58	3.83
10.20	178.1	142.5	122.4	75.60	39.60	26.51	18.75	12.75	8.90	7.55	3.81
10.50	172.5	138.0	118.6	73.24	38.36	26.25	18.56	12.62	8.85	7.52	3.80
10.80	146.3	134.0	116.3	71.82	37.62	25.98	18.38	12.50	8.76	7.50	3.79

Constant power discharge characteristic (W,25°C)

F.V/TIME	5min	10min	15min	30min	60min	2h	3h	5h	8h	10h	20h
9.60	1969	1620	1407	897.8	477.7	313.2	223.8	153.0	108.3	90.89	46.13
9.90	1910	1571	1379	879.8	460.8	311.6	222.7	152.2	107.3	90.45	45.90
10.20	1870	1539	1351	861.8	451.4	307.0	220.5	150.7	106.8	90.09	45.72
10.50	1811	1490	1308	834.9	437.3	304.0	218.3	149.2	106.2	89.77	45.56
10.80	1536	1447	1283	818.7	428.9	300.9	216.1	147.7	105.10	89.55	45.45



Kaiying Power Supply & Electrical Equip Co., Ltd Email: sales@longwaybattery.com
 Tel:0595-68782266 Fax:0595-68782222 Website: <http://www.longwaybattery.com>
 Add: Kaiying IndustrialArea, Chengxiang Town, Anxi, Quanzhou, Fujian Province, China
 KY-IOP-FR12-75 B0.Auguest 2023

Note: This information usually describes use only and is not intended to make any warranties or promises regarding the battery, Battery specifications and battery design are subject to change without prior notice. Please contact LONGWAY Battery for the latest information.