



Jump-starter battery

6FM14 (12V14Ah)

LONGWAY Jump-starter batteries are used for emergency start power supply, which can cope with various emergency situations. The series of batteries adopts thin sheet multi-board design, and the special lead paste formula improves the instantaneous high current (100-1000A) capacity of the battery, which can meet the requirements of automobile start-up in emergency situations. The products are UL, CE, RoHS certified and can be shipped by sea and air.



Features	Application
<ul style="list-style-type: none"> ·No free acid (Non-spillable battery) ·Heavy Duty Grids ·Long Service Life ·The battery is designed for high current discharge ·Maintenance free (no water topping-up required) ·Can be used in any orientation (excluding used) ·Low Self Discharge 	<ul style="list-style-type: none"> ·Jumpstarter ·lawn mower start ·car backup ignition ·Generator start-up ·Outdoor backup starting, lighting ·And other cold starting equip

General: Design for standby power applications


Design Life: Up to 5 years in standby service at	Float Charging Voltage: 13.5~13.8 VDC/Unit at 25°C
Operating Temperature Range: Nominal operating temperature: Discharge: -15°C~50°C Charge : -15°C~40°C Storage: -15°C~40°C	Equalization Charging Voltage: 14.4~15.0 VDC/Unit at 25°C Self Discharge: Less than 10% after 90 days, can be stored up to 6 at 25°C; Fully recharge is required before usage



ISO9001: 2015
ISO14001:2015
ISO45001:2018

Specifications: Designed according with the IEC61056-1/2:2012

Nominal Voltage	12 V
Nominal Capacity	14.0Ah@20hr,25°C
Cold cranking Amp	215A (30sec) @ to 1.20Vper cell @-5°C
Weight	Approx. 3.9 ± 3% kg
Internal Resistance	Approx. 11.0mΩ @ full charged 25°C
Terminal	F7
Max. Discharge Current	250A (15sec) @ to 1.20Vper cell@25°C
Max. Charge Current	3.6A
Container Material	Standard: ABS (UL94-HB) Optional: Flame Retardant ABS(UL94-V0)

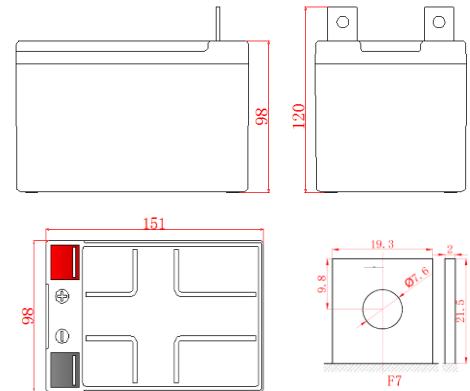

Constant Current Discharge Characteristics (A, 25°C)

F.V/TIME	5min	8min	10min	15min	20min	30min	60min	90min
9.60	694	517	448	356	266	198.1	115.9	92.1
9.90	683	508	447	357	264	196.3	114.8	90.9
10.2	672	499	430	341	255	193.3	111.3	88.6
10.5	651	484	419	336	252	190.2	107.8	88.2

Starting Specification

temperature	0°C	5°C	15°C	25°C	35°C	45°C
Cranking Amp	215	220	232	250	270	290
Time /FV 7.2V	≥30S	≥30S	≥30S	≥30S	≥30S	≥30S

Kaiying Power Supply & Electrical Equip Co.,Ltd

Add:Laogang Industrial Area,Chengxiang Town ,Anxi,Quanzhou, Fujian Province ,China

Tel: 0595-68782266 Fax: 0595-68782222

Website: <http://www.longwaybattery.com>

KY-IOP-LW12-215CCA B0. August 2023

Email:sales@longwaybattery.com

NOTE: This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact Long Way for the latest information.