



## High Rate Series Battery

# 6FM40G (12V150W/Cell/1.67V/15Min)

LONG WAY® High Rate battery 6FM40G is design for high rate discharge. This series is a high energy, high intensity, and high quality output electrical energy product series, With 20% more energy density than same volume products at high rate discharge characteristics.



### Features

- Maintenance free (no water topping-up required)
- No free acid (Non-spillable battery)
- Can be used in any orientation (excluding used inverted)
- Low Pressure Venting System
- Heavy Duty Grids
- The battery is designed for high rate usage
- Long Service Life
- Low Self Discharge
- Wide Operating Temperature Range

### Applications

- UPS power supplies
- Emergency lighting equipment
- Precision instrument backup power
- Fire alarms and security systems
- Communications and electric equipment
- Office computers, processors and other office automation equipment
- Emergency power supplies in power generation plants and substations
- Telecommunications
- Various telemeter equipment

**General:** Design for standby power applications

<b>Design Life:</b> Up to 5 years in standby service at 25°C	<b>Float Charging Voltage:</b> 13.5~13.8 VDC/Unit at 25°C
<b>Operating Temperature Range:</b> Nominal operating temperature: 25°C Discharge: -15°C~50°C Charge : -15°C~40°C Storage: -15°C~40°C	<b>Equalization Charging Voltage:</b> 14.4~15.0 VDC/Unit at 25°C <b>Self Discharge:</b> Less than 10% after 90 days, can be stored up to 6 months at 25°C; Fully recharge is required before usage




ISO9001: 2015

ISO14001:2015

ISO45001:2018

**Specifications:** Designed according with the IEC61056-1/2:2012

Nominal Voltage	12 V
Nominal Capacity	150W@15 min-rate to 1.67V per cell 25°C 40.0Ah@20hr,25°C
Weight	Approx. 13.70 ± 3% kg
Internal Resistance	Approx.7.5mΩ @ full charged 25°C
Terminal	I5
Max. Discharge Current	200A (3sec.)
Max. Charge Current	6A
Container Material	Standard: ABS (UL94-HB) Optional: Flame Retardant ABS(UL94-V0)

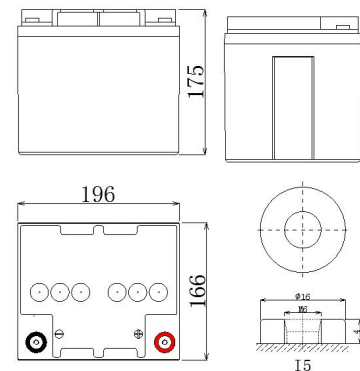

### Constant Current Discharge Characteristics (A, 25°C)

F.V/TIME	3min	5min	10min	15min	20min	30min	60min	90min
9.60	272.0	225.2	107.2	82.00	61.60	42.00	24.00	16.60
10.0	265.2	219.6	104.5	80.20	60.24	40.95	23.76	16.43
10.2	258.4	213.9	100.8	76.67	57.60	40.11	23.04	16.02
10.5	247.5	205.4	98.09	75.44	56.98	39.06	22.32	15.94

### Constant Power Discharge Characteristics (Watt, 25°C)

F.V/TIME	5min	8min	10min	15min	20min	30min	60min	90min
9.60	2946	2446	1183	902.8	678.2	466.2	277.9	193.2
10.0	2896	2404	1179	904.6	672.3	461.9	275.1	190.8
10.2	2853	2362	1137	864.8	649.7	454.8	266.8	186.0
10.5	2762	2292	1106	851.0	642.7	447.6	258.5	185.0

Kaiying Power Supply & Electrical Equip Co.,Ltd

Tel: 0595-68782266 Fax: 0595-68782222

Add:Laogang Industrial Area,Chengxiang Town ,Anxi,Quanzhou, Fujian Province ,China

Website: <http://www.longwaybattery.com>

Email:[sales@longwaybattery.com](mailto:sales@longwaybattery.com)

KY-IOP-HR12-150W A0. February2023

**NOTE:** This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact Long Way for the latest information.