

6-EVF-55 (12V55AH/10HR)

This series adopts AGM techno maintenance-free, high chargir	the Deep Cycle battery of LONGWAY BATTER blogy, which has high safety & reliability, ng rate, low self-discharge, and long life. Electric scooter, Electric wheel chair, Electric and police patrol car etc.	
Specifications: Designed acc	ording with the IEC60254-2014	
Nominal Voltage	12Volts (6 Cells per unit)	1 Bits

58.0Ah @ 1.75V per cell@25°C (77°F) 55.0AH @ 1.75V per cell@25℃ (77°F) 53.0AH@1.70Vper cell@25°C (77°F)

46.0AH@1.70Vper cell@25°C (77°F)

Approx. 7.20mΩ full charged @25°C

14.40~15.0VDC/unit Average @ 25°C

Discharge: -20°C~50°C; Charge: 0°C~40°C

ABS (UL 94-HB) & Flame Retardant (94-V0)

LONGWAY batteries can be stored for more than 6 months and the Self-discharge ratio less than 3%per

month at 25°C.Please charge batteries before using.

Approx.16.0 ± 3%kg(35.27lbs)

@25°C

400A(3sec)

13.75A

I3 (M6 stem)

Storage: -20°C~40°C

available upon request

229

Ħ

⊕ ⊙

Ħ

o 🔒

Norminal Voltage		
Nominal Capacity		
20hr -rate (2.75A)		
10Hr-rate (5.50A)		
5Hr-rate(9.30A)		
3Hr-rate(13.8A)		
Weight		
Internal Resistance		
Maximum Discharge Current		
Operating Temperature Range		


Equalization and Cycle Service Maximum Charging Current Terminal Container Material


Self Discharge

Dimensions

Length:229±2mm Width :138±2mm Height :208±2mm Total Height :212±2mm

Cycle Service Life

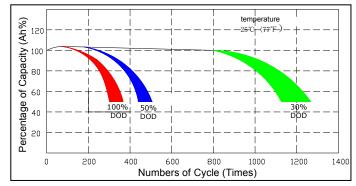

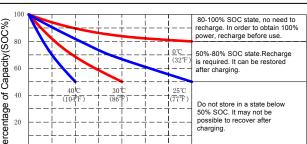

Kaiying Power Supply & Electrical Equip Co., Ltd

Add: Laogang Industrial Area, Chengxiang Town , Anxi, Quanzhou City, Fujian Province , China

Tel: 0595-68782266 Fax: 0595-68782222 Web: www.longwaybattery.com Email: sales@longwaybattery.com KY-IOP-6-EVF-55 A0. January 2021

NOTE: This information is generally descriptive only and is not intended to make or imply any representation, guarantee or warranty with respect to any cells and batteries. Cell and battery designs/specifications are subject to modification without notice. Contact Long Way for the latest information.

Outer Dimensions

213

38

Terminal Type

ISO9001:2015

ISO14001:2015

ISO45001:2018

ISO50001:2011


APPLICATION STANDARDS

ISO 7176-25 - 2013

IEC 60254-1- 2005

SAE J1495-2018

UL1989 (MH46789)



Capacity Retention Characteristic

