



General VRLA Battery

12FM8 (24V8Ah)

The LONGWAY General Series small batteries (less than 24Ah) are designed and developed using AGM technology and valve controlled sealing technology. They can meet conventional performance requirements, with a designed float charging life of over 5 years. The valve controlled non-spillable structure design allows safe use in any direction and is certified by sea and air freight. The battery performance also meets international standards, such as IEC61056-2012, JIS C8702-1-2003, UL1989, etc.



General Feature

- High reliability, safe without leakage, can be used in any position
- Excellent recovery performance after deep discharge
- Environmentally friendly products.
Meet EU battery directive RoHS and REACH standards
- Maintenance free
- Widely applicable temperature range, can be used at -20 °C~60°C
- Low self-discharge rate. The average monthly self-discharge rate of the battery is less than 2.5%
(It is recommended to recharge after storage for 6 months or before use)


Applications

- Emergency lights; Alarm system
- Electrical test equipment; communication Equipment
- Uninterruptible power supply; Fire & Security
- Electric toys; Control instruments
- Portable Movie & Video lights
- Electric tools; Solar system
- Robots and control machines and other

Performance

Nominal Voltage	24V (12cells)
Capacity	@25°C
20hr Rate (0.40A)	8.00Ah @ to 1.75V/cell
3hr Rate (2.00A)	6.00Ah @ to 1.70V/cell
27min Rate (8.00A)	4.67Ah @ to 1.60V/cell
Weight	Approx (4.50±3%)kg (9.92lbs)
Internal Resistance	Approx 36.0mΩ fully charged @25°C
Maximum Discharge Current	105A(3sec)
Terminal	F2
Operating Temperature Range	Discharge:-20°C~60°C; Charge:0°C~50°C Storage:-20°C~40°C
Container Material	ABS(UL94 HB)/UL94-V0 Optional

Dimensions

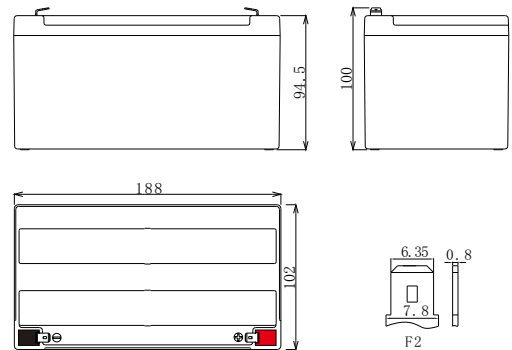

Length	188.0mm	7.40inch
Width	102.0mm	4.02inch
Height	94.5mm	3.72inch
Total height	100.0mm	3.94inch

Battery use

Cycle use

1. Limit the initial charging current to no more than 2.4A
2. Keep charging voltage at 28.8-30.0V/ unit, and continue charging at least 3 hours after the charging current reduces to 0.16A to ensure full charge
3. The compensation coefficient of charging voltage and temperature is -5mv/cell /°C

Float use

1. Limit the initial charging current to no more than 2.4A
2. Keep charging voltage at 27.0-27.6V/unit. When the voltage reaches the constant voltage, the current gradually decreases until the battery is fully charged and continues to charge
3. The compensation coefficient of charging voltage and temperature is -3mv/cell /°C



Kaiying Power Supply & Electrical Equip Co., Ltd

Email: sales@longwaybattery.com

Tel:0595-68782266 Fax:0595-68782222

Website: <http://www.longwaybattery.com>

Add: Kaiying Industrial Area, Chengxiang Town, Anxi, Quanzhou, Fujian Province, China

KY-IOP-LW24-8D B0. May 2023

Note: This information usually describes use only and is not intended to make any warranties or promises regarding the battery. Battery specifications and battery design are subject to change without prior notice. Please contact LONGWAY Battery for the latest information.




General VRLA Battery

12FM8 (24V8Ah)


Floating Charging Life VS Temperature




Floating Charging Characteristics Diagram

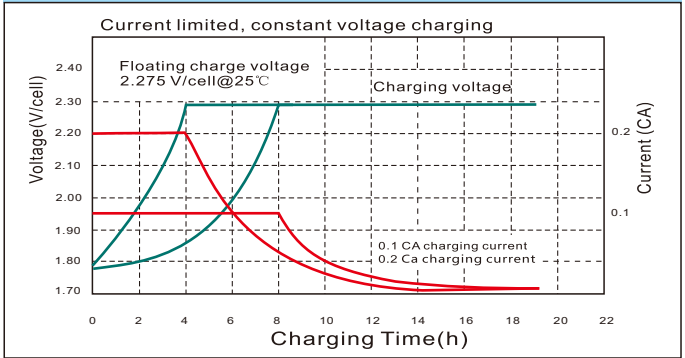

Cycle Life

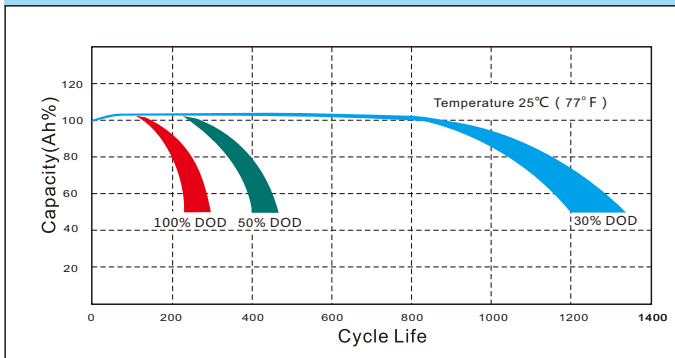


Cycle charging characteristic diagram

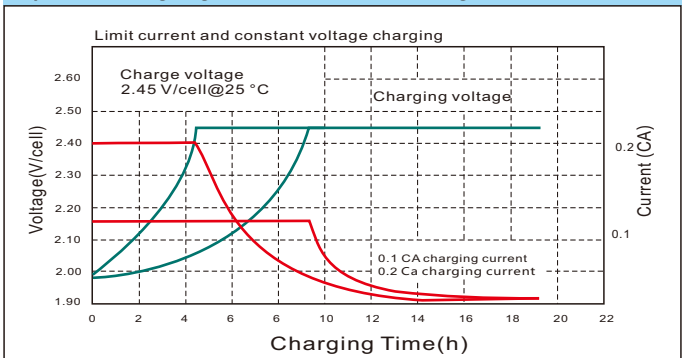

Temperature and capacity characteristics



Self-discharge characteristic

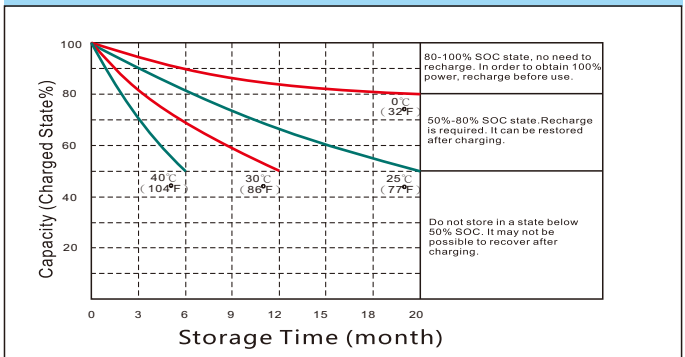

Constant current characteristics(A,25°C)

F.V/TIME	5min	10min	15min	30min	60min	90min	2h	3h	5h	10h	20h
19.2	32.0	20.8	15.2	8.64	4.80	3.68	2.92	2.03	1.38	0.75	0.41
19.8	31.0	20.2	14.7	8.38	4.66	3.61	2.89	2.01	1.37	0.74	0.40
20.4	30.4	19.8	14.6	8.29	4.61	3.53	2.88	2.00	1.36	0.74	0.40
21.0	29.4	19.1	14.0	7.95	4.42	3.46	2.85	1.98	1.35	0.74	0.40
21.6	28.6	18.6	13.9	7.88	4.38	3.39	2.82	1.96	1.33	0.74	0.40

Constant power discharge characteristic (W,25°C)

F.V/TIME	5min	10min	15min	30min	60min	90min	2h	3h	5h	10h	20h
19.2	714	469	347	198	111	86.1	68.4	48.2	33.0	17.9	9.7
19.8	693	455	336	192	108	84.4	67.7	47.8	32.6	17.8	9.7
20.4	679	446	333	190	107	82.7	67.4	47.5	32.5	17.8	9.7
21.0	657	432	319	182	102	80.9	66.7	47.0	32.2	17.7	9.6
21.6	638	419	316	181	101	79.2	66.0	46.6	31.8	17.7	9.6



Kaiying Power Supply & Electrical Equip Co., Ltd Email: sales@longwaybattery.com
 Tel:0595-68782266 Fax:0595-68782222 Website: <http://www.longwaybattery.com>
 Add: Kaiying Industrial Area, Chengxiang Town, Anxi, Quanzhou, Fujian Province, China
 KY-IOP-LW24-8D B0. May 2023

Note: This information usually describes use only and is not intended to make any warranties or promises regarding the battery. Battery specifications and battery design are subject to change without prior notice. Please contact LONGWAY Battery for the latest information.