



Electrical toy car battery series

6FM18 (12V18Ah)

@LONGWAY Brand toy car batteries are specially designed and developed for children's electric strollers, electric scooters and other toy cars. It uses special lead paste formula and Internalized formation production process to ensure that the battery has the advantages of long cycle life, low self-discharge rate and strong storage capacity. Products meet the requirements of IEC and DOE energy efficiency standards, pass UL, CE, RoHS certification, and can be shipped by sea or air.



General Feature

- High reliability, safe without leakage, can be used in any position
- Excellent recovery performance after deep discharge
- Environmentally friendly products
Meet EU battery directive RoHS and REACH standards
- Maintenance free
- Widely applicable temperature range, can be used at -20°C~60°C
- Long Storage time. Battery with full state of charge under room temperature, after 6-12 months storage, it can be used & recovered (It is recommended to recharge after storage for 6 months or before use)


Applications

- Children's electric car with three-wheels
- Children's electric cars
- Children's drift cars
- Children's electric karts
- Electric scooter
- Electric balance car
- And other electric toys, electric tools etc

Performance

Nominal Voltage	12V (6cell)
Capacity	@25°C
20hr Rate (0.90A)	19.3Ah @ to 1.75V/cell
3hr Rate (4.50A)	13.5Ah @ to 1.70V/cell
27min Rate (18.0A)	11.1Ah @ to 1.60V/cell
Weight	Approx (5.30±3%)kg (11.68lbs)
Internal Resistance	Approx 11.9mΩ fully charged @25°C
Maximum Discharge Current	144A(3sec)
Terminal	F5
Operating Temperature Range	Discharge:-20°C~60°C; Charge:0°C~50°C Storage:-20°C~40°C
Container Material	ABS(UL94 HB)/UL94-V0 Optional

Dimensions

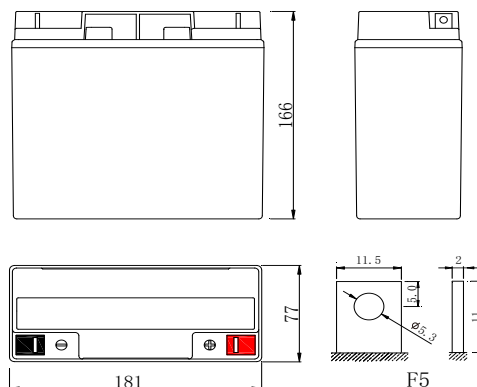

Length	181mm	7.13inch
Width	77 mm	3.03inch
Height	166mm	6.57inch
Total height	166mm	6.57inch

Battery use

Cycle use

- 1.Limit the initial charging current to no more than 5.4A
- 2.Keep charging voltage at 14.40-15.00V/unit, and continue charging at least 3 hours after the charging current reduces to 0.36A to ensure full charge
- 3.The compensation coefficient of charging voltage and temperature is -5mv/cell /°C

Float use

- 1.Limit the initial charging current to no more than 5.4A
2. Keep charging voltage at 13.50-13.80V/unit. When the voltage reaches the constant voltage the current gradually decreases until the battery is fully charged and continues to charge
- 3.The compensation coefficient of charging voltage and temperature is -3mv/cell /°C



Kaiying Power Supply & Electrical Equip Co., Ltd Email: sales@longwaybattery.com
Tel:0595-68782266 Fax:0595-68782222 Website: <http://www.longwaybattery.com>
Add: Kaiying IndustrialArea, Chengxiang Town, Anxi, Quanzhou, Fujian Province, China
KY-IOP-LW12-18D B0.May 2023


Note: This information usually describes use only and is not intended to make any warranties or promises regarding the battery, Battery specifications and battery design are subject to change without prior notice. Please contact LONGWAY Battery for the latest information.




Electrical toy car battery series

6FM18 (12V18Ah)


Floating Charging Life VS Temperature

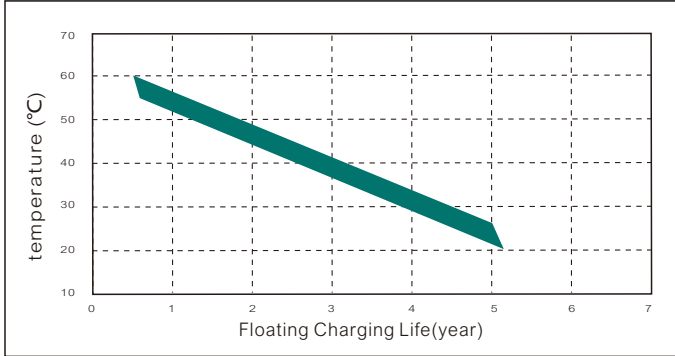


Floating Charging Characteristics Diagram

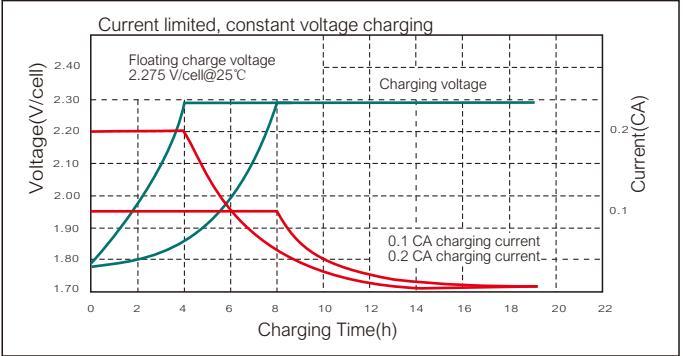


Cycle Life

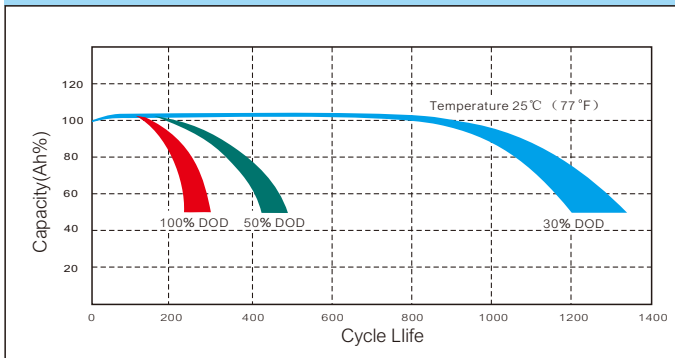


Cycle charging characteristic diagram

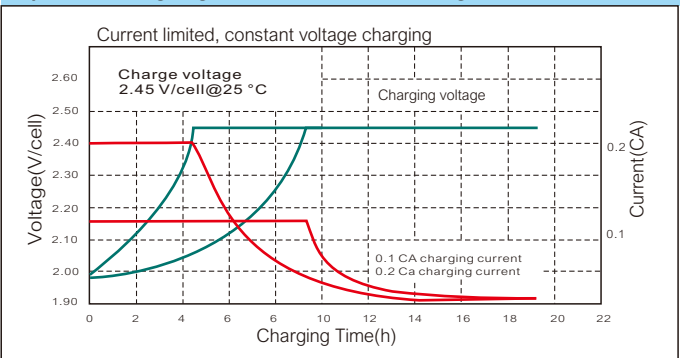

Temperature and capacity characteristics

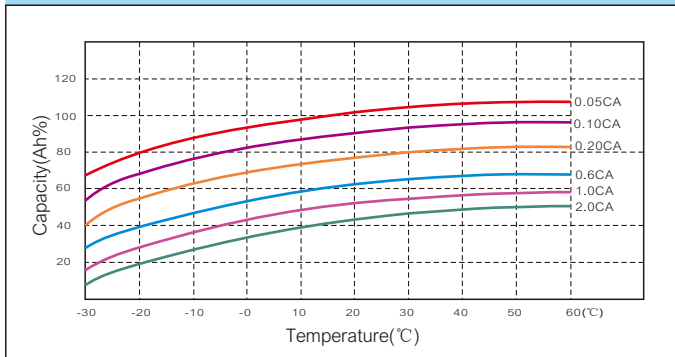

Self-discharge characteristic

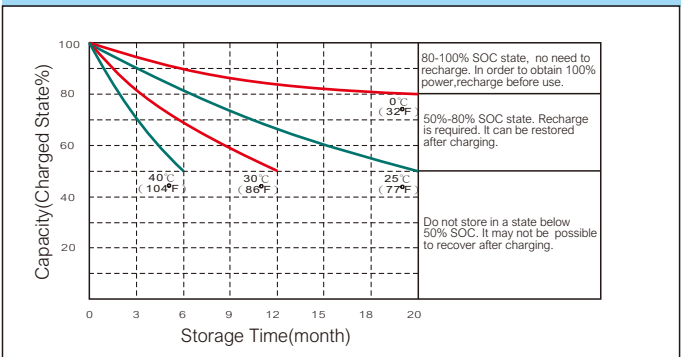

Constant current characteristics(A,25°C)

F.V/TIME	5min	10min	15min	30min	60min	90min	2h	3h	5h	10h	20h
9.60	77.4	45.0	34.2	21.2	11.2	8.37	6.76	5.12	3.38	1.83	0.95
9.90	75.1	43.7	33.2	20.6	10.8	8.20	6.69	5.07	3.35	1.82	0.95
10.2	73.5	42.8	32.8	20.4	10.7	8.04	6.66	5.04	3.33	1.81	0.94
10.5	71.2	41.4	31.5	19.5	10.3	7.87	6.59	4.99	3.30	1.80	0.94
10.8	69.1	40.2	31.2	19.4	10.2	7.70	6.53	4.94	3.26	1.80	0.94

Constant power discharge characteristic (W,25°C)

F.V/TIME	5min	10min	15min	30min	60min	90min	2h	3h	5h	10h	20h
9.60	864	508	390	243	129	97.9	79.1	60.8	40.4	21.9	11.4
9.90	838	492	378	236	125	96	78.3	60.2	40.0	21.8	11.3
10.2	821	482	374	234	124	94	77.9	59.9	39.8	21.7	11.3
10.5	795	467	359	224	119	92.1	77.1	59.3	39.4	21.6	11.3
10.8	771	453	356	222	118	90.1	76.4	58.7	39.0	21.6	11.2



Kaiying Power Supply & Electrical Equip Co., Ltd Email: sales@longwaybattery.com
 Tel:0595-68782266 Fax:0595-68782222 Website: <http://www.longwaybattery.com>
 Add: Kaiying IndustrialArea, Chengxiang Town, Anxi, Quanzhou, Fujian Province, China
 KY-IOP-LW12-18D B0.May 2023

Note: This information usually describes use only and is not intended to make any warranties or promises regarding the battery, Battery specifications and battery design are subject to change without prior notice. Please contact LONGWAY Battery for the latest information.