



Electrical toy car battery series

12FM8 (24V8Ah)

LONGWAY Brand toy car batteries are specially designed and developed for children's electric strollers, electric scooters and other toy cars. It uses special lead paste formula and Internalized formation production process to ensure that the battery has the advantages of long cycle life, low self-discharge rate and strong storage capacity. Products meet the requirements of IEC and DOE energy efficiency standards, pass UL, CE, RoHS certification, and can be shipped by sea or air.



General Feature

- High reliability, safe without leakage, can be used in any position
- Excellent recovery performance after deep discharge
- Environmentally friendly products
Meet EU battery directive RoHS and REACH standards
- Maintenance free
- Widely applicable temperature range, can be used at -20°C~60°C
- Long Storage time. Battery with full state of charge under room temperature, after 6-12 months storage, it can be used & recovered (It is recommended to recharge after storage for 6 months or before use)


Applications

- Children's electric car with three-wheels
- Children's electric cars
- Children's drift cars
- Children's electric karts
- Electric scooter
- Electric balance car
- And other electric toys, electric tools etc

Performance

Nominal Voltage	24V (12cell)
Capacity	@25°C
20hr Rate (0.40A)	8.00Ah @ to 1.75V/cell
3hr Rate (2.00A)	6.00Ah @ to 1.70V/cell
27min Rate (7.00A)	4.90Ah @ to 1.60V/cell
Weight	Approx (4.48 ± 3%)kg (9.87lbs)
Internal Resistance	Approx 36.0mΩ fully charged @25°C
Maximum Discharge Current	105A(4sec)
Terminal	F2
Operating Temperature Range	Discharge:-20°C~60°C; Charge:0°C~50°C Storage:-20°C~40°C
Container Material	ABS(UL94 HB)/UL94-V0 Optional

Dimensions

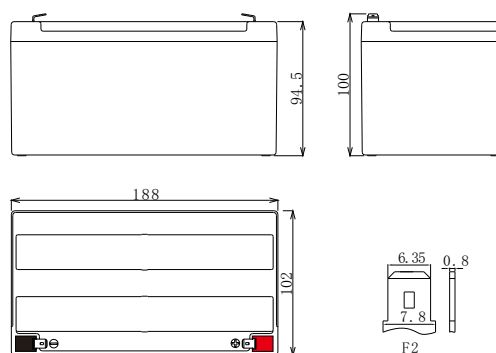

Length	188.0mm	7.40inch
Width	102.0mm	4.02inch
Height	94.5mm	3.72inch
Total height	100.0mm	3.94inch

Battery use

Cycle use

- 1.Limit the initial charging current to no more than 2.40A
- 2.Keep charging voltage at 28.8-30.00 V/unit, and continue charging at least 3 hours after the charging current reduces to 0.16A to ensure full charge
- 3.The compensation coefficient of charging voltage and temperature is -5mv/cell /°C

Float use

- 1.Limit the initial charging current to no more than 2.40A
2. Keep charging voltage at 27.00-27.60 V/unit. When the voltage reaches the constant voltage the current gradually decreases until the battery is fully charged and continues to charge
- 3.The compensation coefficient of charging voltage and temperature is -3mv/cell /°C



Kaiying Power Supply & Electrical Equip Co., Ltd Email: sales@longwaybattery.com
 Tel:0595-68782266 Fax:0595-68782222 Website: <http://www.longwaybattery.com>
 Add: Kaiying Industrial Area, Chengxiang Town, Anxi, Quanzhou, Fujian Province, China
 KY-IOP-LW24-8A B0.May 2023


Note: This information usually describes use only and is not intended to make any warranties or promises regarding the battery, Battery specifications and battery design are subject to change without prior notice. Please contact LONGWAY Battery for the latest information.




Electrical toy car battery series

12FM8 (24V8Ah)


Floating Charging Life VS Temperature

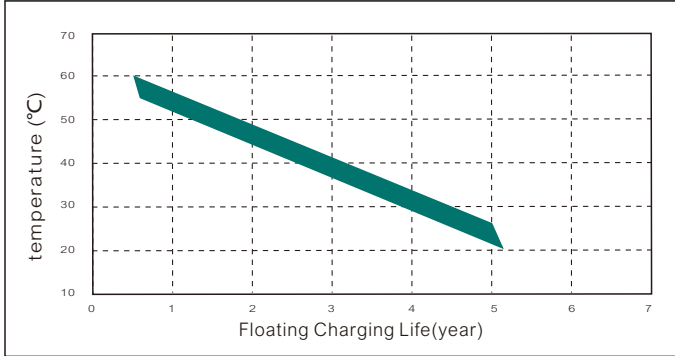


Floating Charging Characteristics Diagram

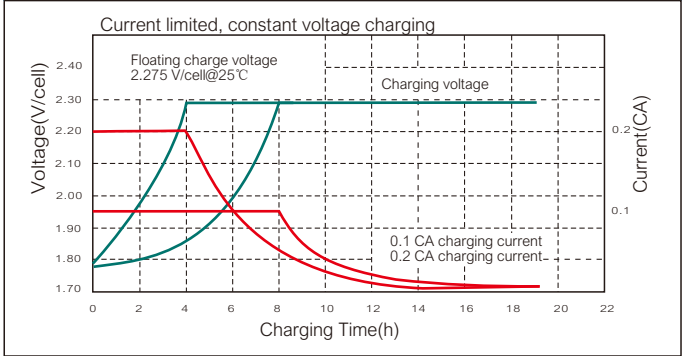

Cycle Life

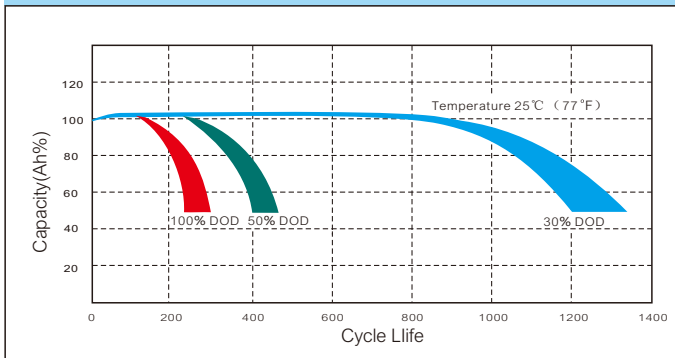

Cycle charging characteristic diagram

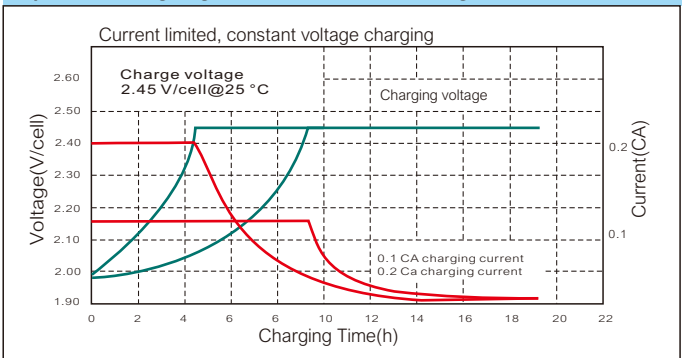

Temperature and capacity characteristics



Self-discharge characteristic



Constant current characteristics(A,25°C)

F.V/TIME	5min	10min	15min	30min	60min	90min	2h	3h	5h	10h	20h
19.2	32.0	20.8	15.2	8.64	4.80	3.68	2.92	2.03	1.38	0.75	0.41
19.8	31.0	20.2	14.7	8.38	4.66	3.61	2.89	2.01	1.37	0.74	0.40
20.4	30.4	19.8	14.6	8.29	4.61	3.53	2.88	2.00	1.36	0.74	0.40
21.0	29.4	19.1	14.0	7.95	4.42	3.46	2.85	1.98	1.35	0.74	0.40
21.6	28.6	18.6	13.9	7.88	4.38	3.39	2.82	1.96	1.33	0.74	0.40

Constant power discharge characteristic (W,25°C)

F.V/TIME	5min	10min	15min	30min	60min	90min	2h	3h	5h	10h	20h
19.2	714	469	347	198	111	86.1	68.4	48.2	33.0	17.9	9.7
19.8	693	455	336	192	108	84.4	67.7	47.8	32.6	17.8	9.7
20.4	679	446	333	190	107	82.7	67.4	47.5	32.5	17.8	9.7
21.0	657	432	319	182	102	80.9	66.7	47.0	32.2	17.7	9.6
21.6	638	419	316	181	101	79.2	66.0	46.6	31.8	17.7	9.6



Kaiying Power Supply & Electrical Equip Co., Ltd Email: sales@longwaybattery.com
 Tel:0595-68782266 Fax:0595-68782222 Website: <http://www.longwaybattery.com>
 Add: Kaiying IndustrialArea, Chengxiang Town, Anxi, Quanzhou, Fujian Province, China
 KY-IOP-LW24-8A B0.May 2023

Note: This information usually describes use only and is not intended to make any warranties or promises regarding the battery, Battery specifications and battery design are subject to change without prior notice. Please contact LONGWAY Battery for the latest information.