



# General VRLA Battery

## 6FM160G (12V160Ah)

The LONGWAY General Series middle batteries ( more than 24Ah) are designed and developed using AGM technology and valve controlled sealing technology. They can meet conventional performance requirements, with a designed float charging life of over 8 years. The valve controlled non-spillable structure design allows safe use in any direction and is certified by sea and air freight. The battery performance also meets international standards. such as IEC60896-2012, UL1989.etc.



### General Feature

- High reliability, safe without leakage, can be used in any position
- Excellent recovery performance after deep discharge
- Environmentally friendly products.  
Meet EU battery directive RoHS and REACH standards
- Maintenance free
- Widely applicable temperature range, can be used at -20 °C~60°C
- Low self-discharge rate. The average monthly self-discharge rate of the battery is less than 2.5%  
(It is recommended to recharge after storage for 6 months or before use)

### Applications

- Emergency lights; Alarm system
- Electrical test equipment; communication Equipment
- Uninterruptible power supply; Fire & Security
- Electric toys; Control instruments
- Portable Movie & Video lights
- Electric tools; Solar system
- Robots and control machines and other

### Performance

Nominal Voltage	12V (6cells)
Capacity	@25°C
10hr Rate (16.0A)	160.0 Ah @ to 1.75V/cell
5hr Rate (34.0A)	160.0 Ah @ to 1.70V/cell
3hr Rate (40.0 A)	120.0 Ah @ to 1.60V/cell
Weight	Approx (51.5±3%)kg ( 113.53lbs )
Internal Resistance	Approx 3.30mΩ fully charged @25°C
Maximum Discharge Current	400A(3sec)
Terminal	F21
Operating Temperature Range	Discharge:-20°C~60°C; Charge:0°C~50°C Storage:-20°C~40°C
Container Material	ABS(UL94 HB)/UL94-V0 Optional

### Dimensions

Length	532mm	20.94inch
Width	207mm	8.15inch
Height	215mm	8.46inch
Total height	240mm	9.45inch

### Battery use

#### Cycle use

1. Limit the initial charging current to no more than 40A
2. Keep charging voltage at 14.4-15.0V/unit.and continue charging at least 3 hours after the charging current reduces to 3.2A to ensure full charge
3. The compensation coefficient of charging voltage and temperature is -5mv/cell/°C

#### Float use

1. Limit the initial charging current to no more than 40A
2. Keep charging voltage at 13.5-13.8V/unit.When the voltage reaches the constant voltage,the current gradually decreases until the battery is fully charged and continues to charge
3. The compensation coefficient of charging voltage and temperature is -3mv/cell/°C




Kaiying Power Supply & Electrical Equip Co., Ltd Email: [sales@longwaybattery.com](mailto:sales@longwaybattery.com)  
 Tel:0595-68782266 Fax:0595-68782222 Website: <http://www.longwaybattery.com>  
 Add: Kaiying Industrial Area, Chengxiang Town, Anxi, Quanzhou, Fujian Province, China  
 KY-IOP-LW12-160B B0. May 2023

Note: This information usually describes use only and is not intended to make any warranties or promises regarding the battery. Battery specifications and battery design are subject to change without prior notice. Please contact LONGWAY Battery for the latest information.




# General VRLA Battery 6FM160G (12V160Ah)


## Floating Charging Life VS Temperature

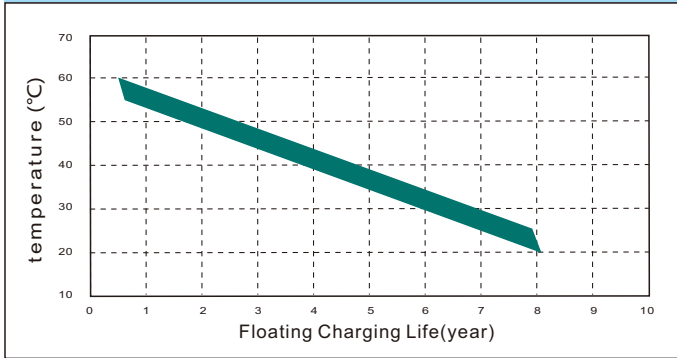


## Floating Charging Characteristics Diagram

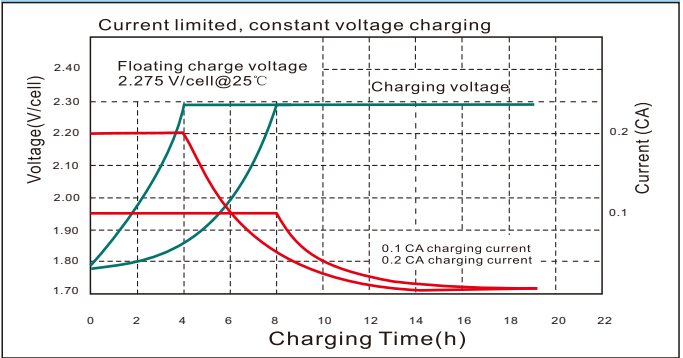


## Cycle Life

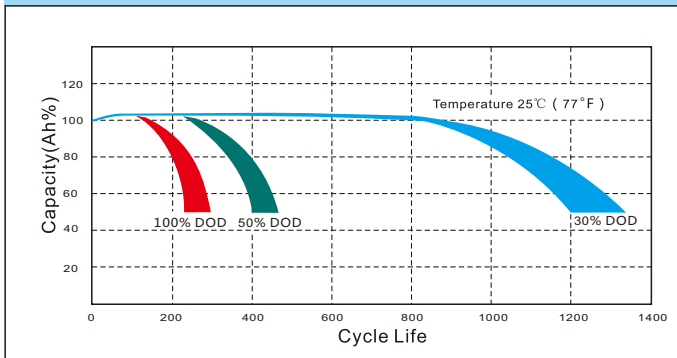


## Cycle charging characteristic diagram

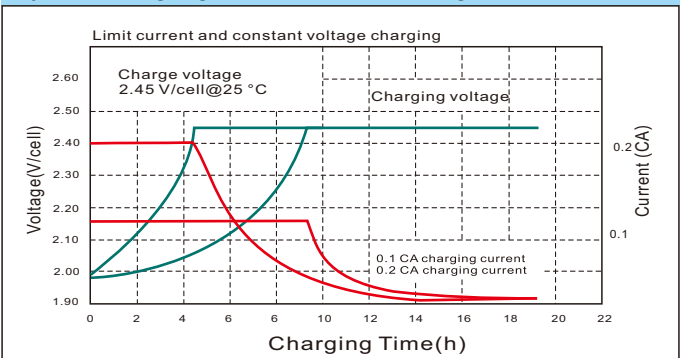

## Temperature and capacity characteristics

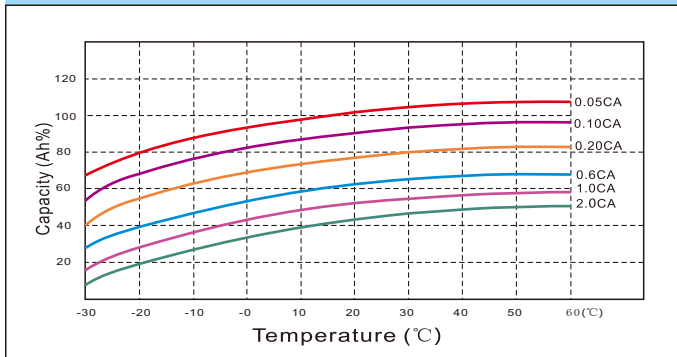

## Self-discharge characteristic

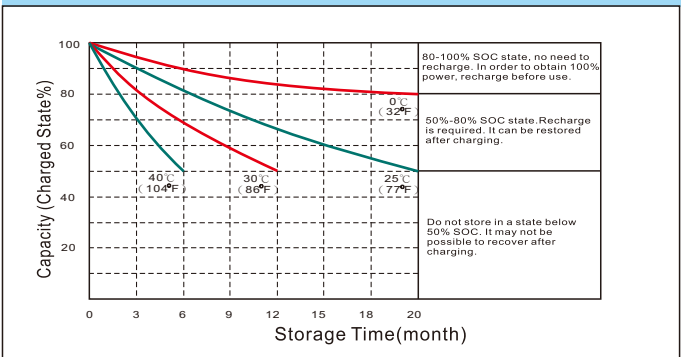

## Constant current characteristics(A,25°C)

F.V/TIME	5min	10min	15min	30min	60min	90min	2h	3h	5h	10h	20h
9.60	432.0	368.0	280.0	164.8	89.6	55.2	40.60	27.93	18.68	16.24	8.36
9.90	419.0	357.0	274.4	161.5	87.8	54.9	40.40	27.80	18.58	16.16	8.32
10.2	410.4	349.6	268.8	158.2	86.0	54.4	40.00	27.52	18.51	16.10	8.29
10.5	386.6	338.6	260.4	153.3	83.3	53.9	39.60	27.24	18.46	16.05	8.26
10.8	354.2	328.6	255.4	150.3	81.7	53.3	39.20	26.97	18.40	16.00	8.24

## Constant power discharge characteristic (W,25°C)

F.V/TIME	5min	10min	15min	30min	60min	90min	2h	3h	5h	10h	20h
9.60	4666	4019	3192	1849	1021	639	477.5	330.2	224.1	193.9	100.4
9.90	4526	3898	3013	1812	1001	636	475.1	328.5	223.0	193.0	99.9
10.2	4432	3818	2951	1775	981	630	470.4	325.3	222.1	192.2	99.5
10.5	4176	3697	2859	1720	950	624	465.7	322.0	221.5	191.6	99.2
10.8	3826	3589	2804	1686	932	617	461.0	318.8	220.8	191.0	98.9



Kaiying Power Supply & Electrical Equip Co., Ltd Email: [sales@longwaybattery.com](mailto:sales@longwaybattery.com)  
 Tel:0595-68782266 Fax:0595-68782222 Website: <http://www.longwaybattery.com>  
 Add: Kaiying Industrial Area, Chengxiang Town, Anxi, Quanzhou, Fujian Province, China  
 KY-IOP-LW12-160B B0. May 2023

Note: This information usually describes use only and is not intended to make any warranties or promises regarding the battery. Battery specifications and battery design are subject to change without prior notice. Please contact LONGWAY Battery for the latest information.